


DIGITUS Modular Plug for Round Cable, CAT 6A, shielded, Pass through connector

AK-219604
EAN 4016032380627

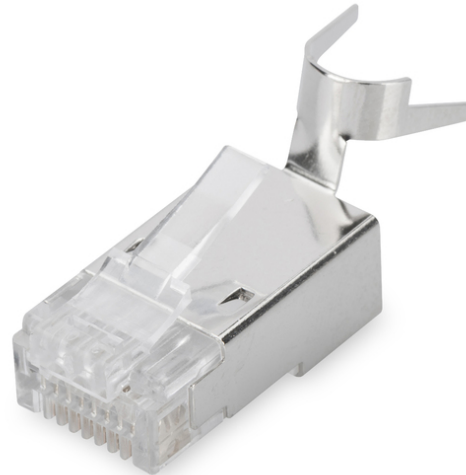

CAT 6A Modular Plug, 8P8C, shielded for solid wire AWG 22-23, pass through

These modular plugs can be used to establish quick and simple connections.

- Crimping tool – DN-94025 (Multi Modular Crimping Tool Pass through connectors)
- Layout performance: CAT 6A, 10GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:

- UL certified
- Technical properties:
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter Cu-Conductor: AWG (23/1... 22/1)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 3 | 14.34 | 37.00 | 51.00 | 33.00 | 62.27 |
| Packaging Unit Inside | 100 | 0.40 | 23.00 | 33.00 | 2.00 | 1.52 |
| Packaging Unit Single | 1 | 0.00 | 1.00 | 2.00 | 0.50 | 1.00 |
| Net single without Packaging | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |