

DIGITUS USB-C 3.1 Gen2 connection cable, USB-C to USB-C

AK-300139-010-S
EAN 4016032426011



USB Type-C connection cable, type C to C M/M, 1.0m, Gen2, 5A, 10GB, 3.1 Version, bl

For connecting external USB devices (with C socket, e.g. PC, tablet or smartphone) to the USB host (e.g. PC, notebook). Data transfer rate up to 10 Gbit/s (Superspeed+).

One cable for Data Transfer, Charging and Video/Audio enjoyment

- USB 3.1 data transfer rate up to 10 Gbps, Superspeed+
- Power supply support up to 20V/5A, 100W
- Support of USB PD (Power Delivery) specification
- Support for Video/Audio up to 4K (4096x2304, 30fps)
- Support of DisplayPort Video/Audio signals
- The possible resolution capability depends on the source device
- Device support at DP 1.2: single channel 5.4 Gbps, max resolution: 4K@60Hz


- Device support at DP1.4: single channel, 8.1 Gbps, resolution: 8K@60Hz

Attributes

- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	5.90	40.00	30.00	18.00	21.60
Packaging Unit Inside	10	0.59	40.00	35.00	7.60	10.64
Packaging Unit Single	1	0.06	25.00	13.50	1.30	438.75
Net single without Packaging	0	0.05	10.00	10.00	1.30	130.00

More images:

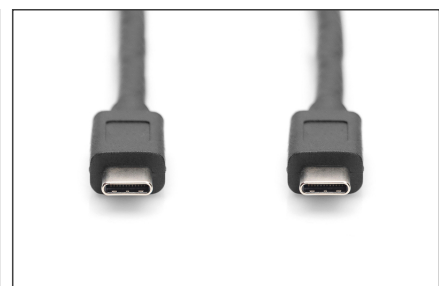

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com