


DIGITUS Cat.7 S/FTP installation cable, 1000 m, simplex, Cca

DK-1744-VH-10
EAN 4016032441281

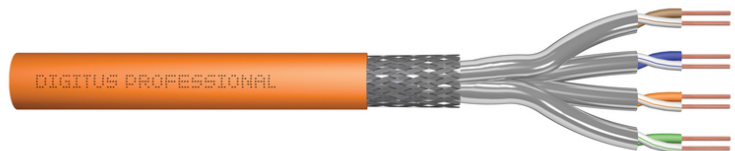

CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 1000m, simplex, orange

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 60332-3-24, EN 50575. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.



Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.50 mm (Eca); 0.52 mm (Dca); 0.60 mm (Cca); 0.60 (B2ca)
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C

- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.0 mm (Eca); 7.2 mm (Dca); 7.5 mm (Cca); 7.5 mm (B2ca)
- Weight (kg/km): 49.5 kg (Eca); 51 kg (Dca), 53 kg (Cca); 53 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Cca
- Length: 1000 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair



Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	8	427.00	125.00	110.00	110.00	1,512,500.00
Packaging Unit Inside	1	53.38	54.70	54.70	36.50	109,211.00
Packaging Unit Single	1	53.38	54.70	54.70	36.50	109,211.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

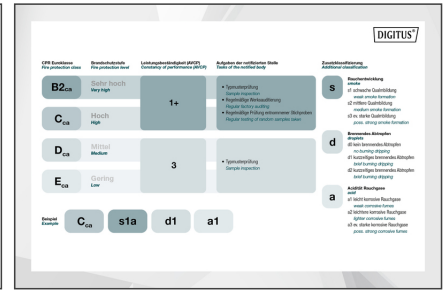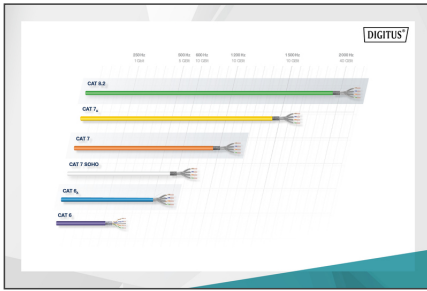

Leitungsparameter: Transmission Properties									
FRÄGE	JEIT	MEIST	FRÄGE	JEIT	MEIST	FRÄGE	JEIT	MEIST	FRÄGE
1.1	2	75	75	75	75	75	75	75	75
1.2	1.1	75	75	75	75	75	75	75	75
1.3	1.1	75	75	75	75	75	75	75	75
1.4	1.1	75	75	75	75	75	75	75	75
1.5	1.1	75	75	75	75	75	75	75	75
1.6	1.1	75	75	75	75	75	75	75	75
1.7	1.1	75	75	75	75	75	75	75	75
1.8	1.1	75	75	75	75	75	75	75	75
1.9	1.1	75	75	75	75	75	75	75	75
2.0	1.1	75	75	75	75	75	75	75	75

Produktbeschreibung Product Information		Physikalische Spezifikationen Physical Properties	
Produktname	Professional Network (Cat 7) S/FTP Installation Cable	Leiter	100% Kupfer, 100% Kupfer, 100% Kupfer
Produkttyp	Installation Cable	Leitungsstruktur	100% Kupfer, 100% Kupfer, 100% Kupfer
Produktlänge	1000m	Leitungsstruktur	100% Kupfer, 100% Kupfer, 100% Kupfer
Produktfarbe	Orange	Leitungsstruktur	100% Kupfer, 100% Kupfer, 100% Kupfer
Produktgewicht	1000g	Leitungsstruktur	100% Kupfer, 100% Kupfer, 100% Kupfer

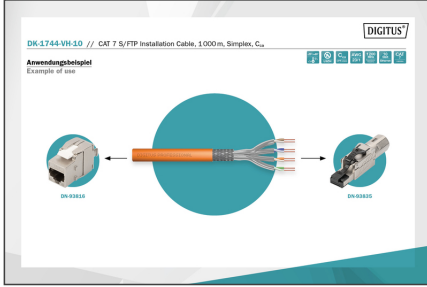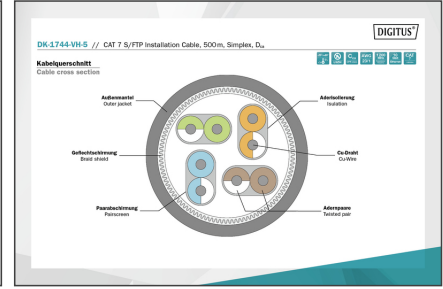

CAT 7 S/FTP Installation Cable, 1000 m, Simplex, C_{ca}

- AWG 23/1
- 1200 MHz
- 10 Gbit Ethernet
- 20°/+50°
- LSZH
- C_{ca} Cat 7
- C_{ca} Cat 7

