


# DIGITUS CAT 6A S/FTP patch cord, 90° angled plug

**DK-1644-A-15090**  
**EAN 4016032461913**

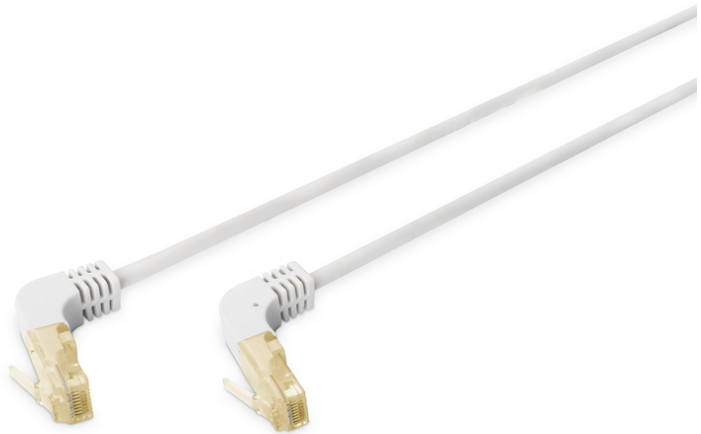

**CAT 6A S-FTP 90° angled patch cord, Cu, LSZH AWG 26/7, length 15 m, color grey**

This DIGITUS® patch cable is equipped with two 90° angled RJ45 plugs. It is ideal for applications where space is limited. The Category 6A Class EA patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 A specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6A cabling. The performance is tested up to 500 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6A, because of the transparent yellow colored connector.

**Future-oriented standards and high-end quality for your network**

- 2x RJ45 (8P8C) 90° angled connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Copper (Cu)
- Configuration: 1:1
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 15 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	10.50	26.00	40.00	26.00	27.04
Packaging Unit Inside	1	0.53	34.00	23.00	5.00	3.91
Packaging Unit Single	1	0.53	34.00	23.00	5.00	3.91
Net single without Packaging	0	0.49	15.00	15.00	12.00	2.70

**More images:**

