

DIGITUS Spiral EV charging cable, 5 m, type 2 to type 2

DK-3P32-S-050
EAN 4016032481539



Three Phase, 415V, 32A, 5 m Type 2 to Type 2 Spiral charger cable

The DIGITUS DK-3P32-S-050 car charging cable allows you to easily connect any vehicle with type 2 plug to public charging stations or wallboxes with charging socket. The type 2 charging cables are certified according to EN 62196-1:2014, EN 62196-2:2017 and protection class IP55.

DIGITUS DK-3P32-S-050 (5 m) high quality flexible cable, offers in longer length, the comfort of charging in Home (garage) and also in public charging station

- Type: Spiral cable
- Length: 5 m
- Usuable length: 3,5 m



- Charging cable type: 5 x 6 mm² + 2 x 0,5 mm²
- Jacket: TPU
- Connector: EN 62196-2 Type 2
- Rated voltage: 400 V
- Rated power: 22 kW
- Rated current: 32 A
- Connection phases: 3
- Operating temperature: -30°C+50°C
- Protection class: IP55 (water-jet protected)

Package contents

- 1 x Charger Cable
- Quick Installation Guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	5	18.80	63.00	38.00	38.00	90.97
Packaging Unit Inside	1	3.76	0.00	0.00	0.00	0.00
Packaging Unit Single	1	3.76	35.00	35.00	15.00	18.38
Net single without Packaging	0	3.08	0.00	0.00	0.00	0.00

More images:

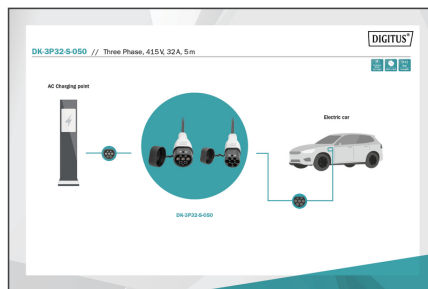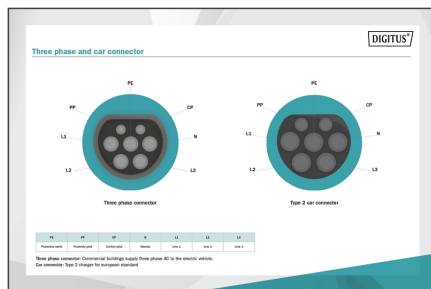



DIGITUS®

22 kW Max. Output Power	32 A Max. Output Current
THREE Phase Connection	5 m Type 2 Cable Length

DK-3P32-S-050
Spiral EV Charging Cable, 5m, Type 2 to Type 2

