


# DIGITUS DisplayPort Adapter Cable

**AK-340301-010-S**  
**EAN 4016032289067**

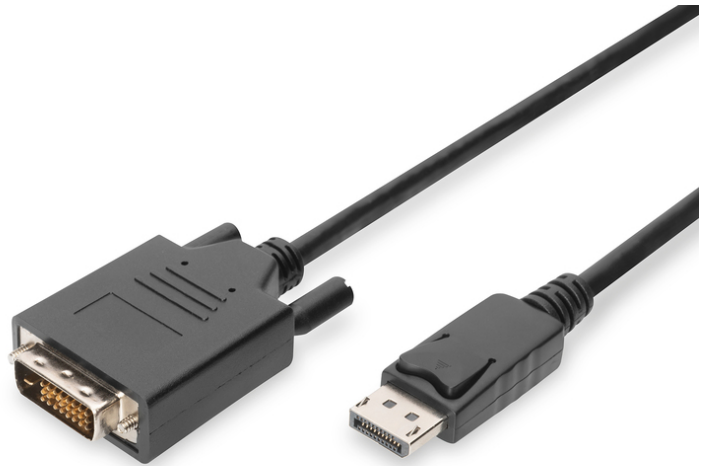

**DisplayPort Adapter Cable, Type DP-DVI (24+1) M/M, 1.0m, w/interlock, DP 1.1a, bi**

This digital HD cable converts DisplayPort signals to DVI signals and is ideal to connect DisplayPort devices to your HD TV, beamer or monitor with DVI interface.

**Full HD resolution of up to 1080p**


- Support up to 1080p with 60Hz
- Copper wire, foil and braid shielding for robustness and reliable connection
- Plug and play, no additional driver needed
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


**Attributes**

- Assortment: DisplayPort Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CU
- Length: 1 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	9.17	50.00	33.00	22.00	36,300.00
Packaging Unit Inside	10	0.92	17.00	15.00	2.00	510.00
Packaging Unit Single	1	0.09	3.00	17.00	24.50	1,249.50
Net single without Packaging	1	0.09	3.00	17.00	24.50	1,249.50

**More images:**

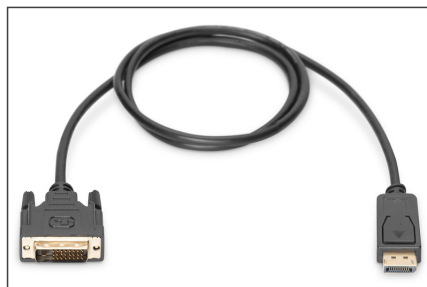

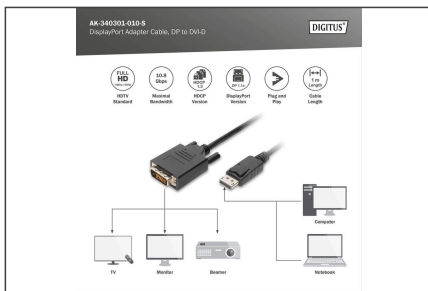

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)