

# DIGITUS mini GBIC (SFP) Module, 10Gbps, 10.0km, with DDM Feature

DN-81201  
EAN 4016032324140



**10G SFP+ Module, Singlemode, DDM LC Duplex Connector, 1310nm, up to 10km**

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

**The plug and play fiber connection**

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1

- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 1310nm
- Transmission Power: Minimum -8 dBm, Maximum -0,5 dBm
- Sensitivity Receiving Power: Minimum -12.5 dBm
- For a distance of up to 10,0km
- Safe fast-locking mechanism
- Operating temperature: 0 °C ~ 70 °C

**Attributes**


- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1310 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

**Package contents**

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.08	3.00	11.50	9.00	310.50

More images:

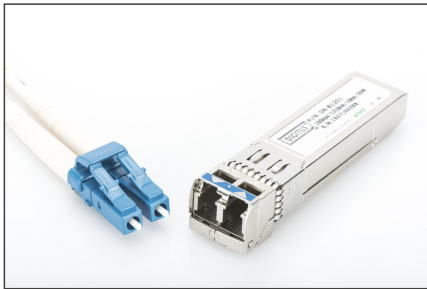

SFP Modules							
Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature	RoHS Status
D84P400	4810000000021	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P401	4810000000020	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P402	4810000000019	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P403	4810000000018	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P404	4810000000017	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P405	4810000000016	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P406	4810000000015	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P407	4810000000014	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P408	4810000000013	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P409	4810000000012	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P410	4810000000011	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P411	4810000000010	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P412	4810000000009	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P413	4810000000008	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P414	4810000000007	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P415	4810000000006	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P416	4810000000005	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P417	4810000000004	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P418	4810000000003	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P419	4810000000002	10 Gbps	300 m	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓
D84P420	4810000000001	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19 mm	-40 to 70 °C	✓



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)